


## Attenuator SMA(m) – SMA(f), 10GHz, 10dB

### FAT-AM5AF5G10G2W10

Vilnius-09, Lithuania; Tel.: +370 5 2135404; e-mail: [info@geozondas.com](mailto:info@geozondas.com)

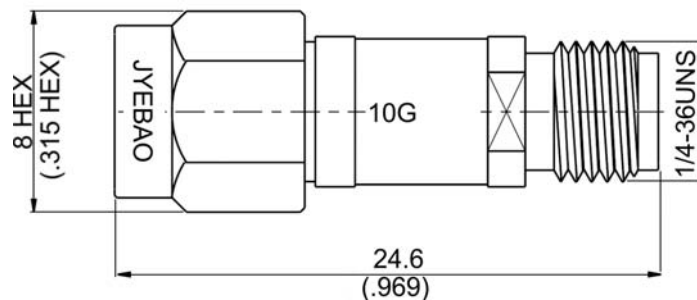

Attenuation	VSWR			Attenuation Deviation (± dB)		
	DC-2GHz	2-5GHz	5-10GHz	DC-2GHz	2-5GHz	5-10GHz
6 dB	≤ 1,15	≤ 1,25	≤ 1,35	± 0,2 dB	± 0,3 dB	± 0,5 dB
10 dB	≤ 1,15	≤ 1,25	≤ 1,35	± 0,2 dB	± 0,3 dB	± 0,5 dB
15 dB	≤ 1,15	≤ 1,25	≤ 1,35	± 0,2 dB	± 0,3 dB	± 0,5 dB
20 dB	≤ 1,15	≤ 1,25	≤ 1,35	± 0,2 dB	± 0,3 dB	± 0,5 dB
30 dB	≤ 1,15	≤ 1,25	≤ 1,35	± 0,5 dB	± 1,5 dB	± 4,0 dB

Impedance, nominal

50 Ohm

Temperature range

(-50 ÷ +80) °C

Weight

4,74 g