


## Flexible cable assemblies SMA(m) – SMA(m)

### GZ2.RD316.001TS

Vilnius-09, Lithuania; Tel.: +370 5 2135404; e-mail: [info@geozondas.com](mailto:info@geozondas.com)

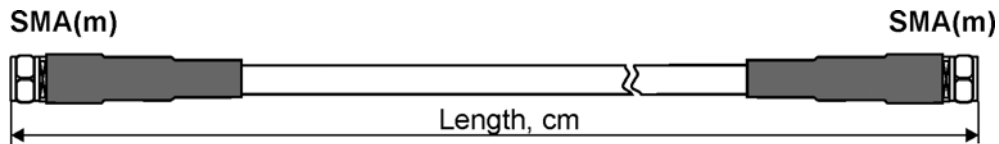

Type	Length
A30A30-316D-050	50 cm
A30A30-316D -100	100 cm
A30A30-316D -150	150 cm
A30A30-316D -200	200 cm
A30A30-316D -XXX	XXX cm

**Connector1:** SMA-male (MIL-STD-346A)

**Connector2:** SMA-male (MIL-STD-346A)

#### Cable

Technical basis	MIL-C-17/152
Dielectric:	Solid PTFE, velocity of propagation 70%
Braiding	2 x SPC braid
Cable jacket:	FEP, light brown color 2,9 mm
Insertion Loss	0,28 dB/m @ 100 MHz 1,0 dB/m @ 1 GHz 1,8 dB/m @ 3 GHz 2,2 dB/m @ 5 GHz
Min. Bending Radius	15,3 mm
Weight	23 g/m
<b>Mechanical characteristics</b>	
Temperature range	-40 ÷ +85°C